



PLAN VIEW

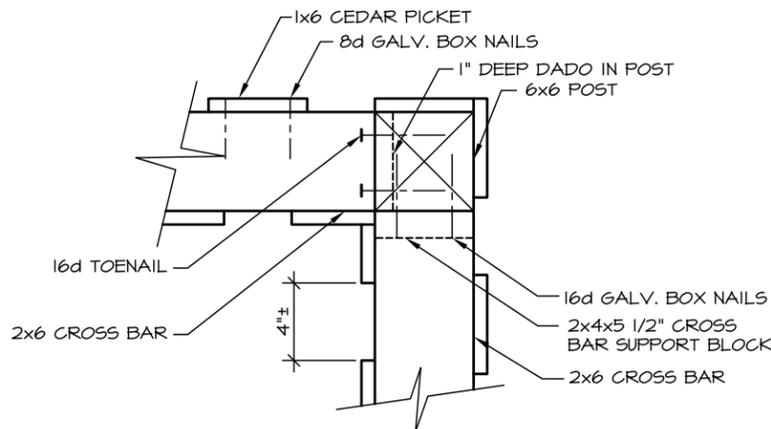


A CORNER DETAIL

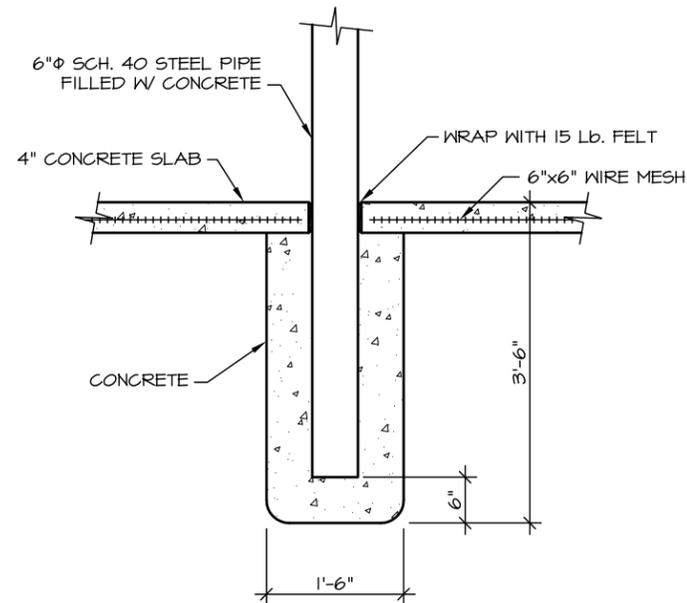


B FOOTING DETAIL

GENERAL NOTES:

1. STAIN ALL WOOD WITH 2 COATS OF STAIN.
2. FILL PIPES WITH CONCRETE & ROUND TOPS.
3. CONCRETE TO HAVE TROWEL FINISH. KEEP SURFACE OF CONCRETE SLAB MOISTENED FOR 7 DAYS.
4. LENGTH & WIDTH OF DUMPSTER SCREEN MAY BE CHANGED TO CORRESPOND WITH LOCAL DUMPSTER SIZES.
5. HOLES FOR WELL PIPE FOOTINGS ARE TO BE HAND DUG OR AUGERED.
6. REAR COLUMN BASES ARE TURNED 90° FROM FRONT BASES FOR ADDITIONAL LATERAL SUPPORT.
7. UNLESS OTHERWISE SPECIFIED, LUMBER SHALL BE TREATED.

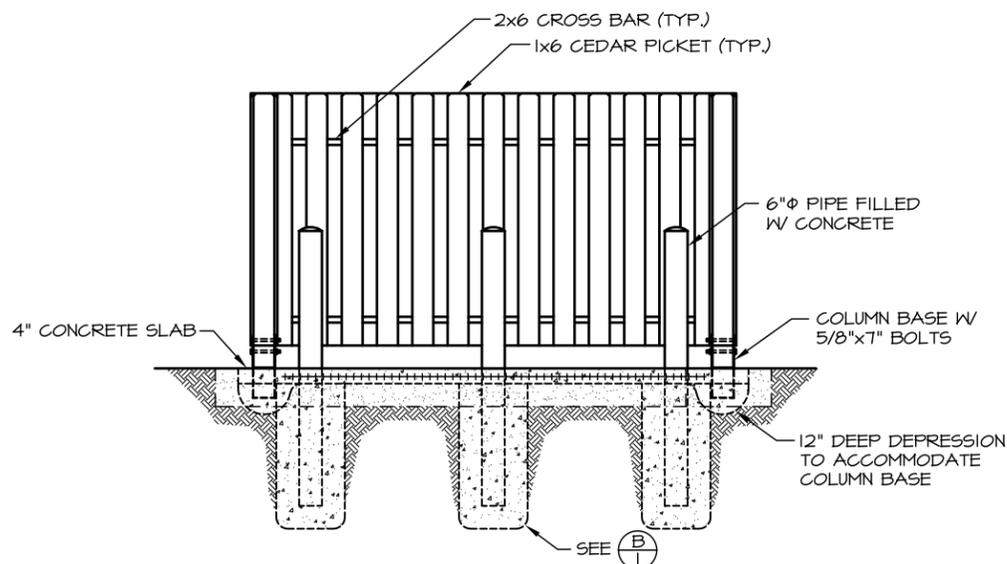

FRONT ELEVATION

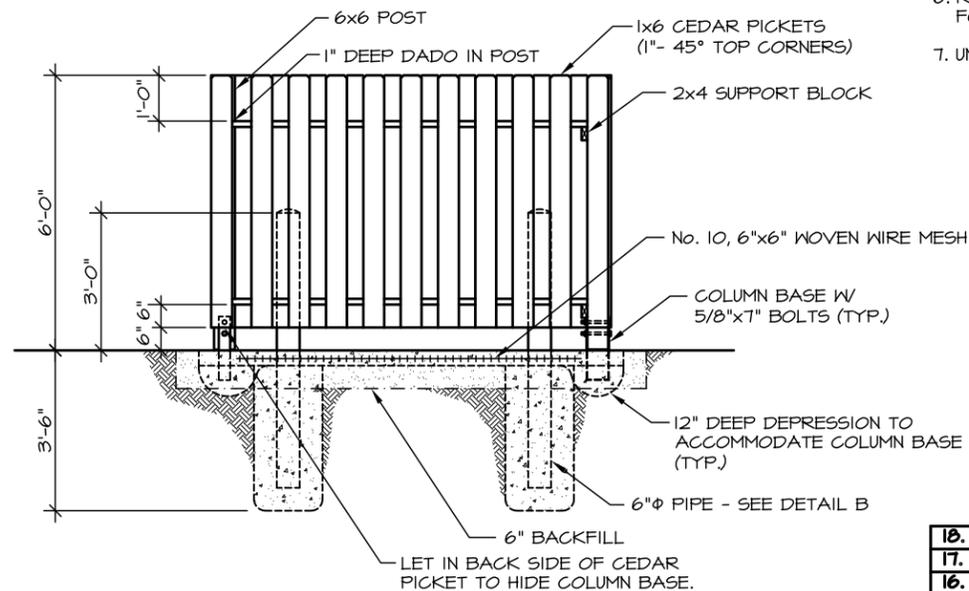

SIDE ELEVATION

FOR INFORMATIONAL USE ONLY  
Alaska State Parks

| NO. | REVISION                          | DATE  | APPROVED |
|-----|-----------------------------------|-------|----------|
| 18. | REMOVED PAINT NOTE                | 04/10 | MP5      |
| 17. | CHANGED WELL PIPE TO SCH. 40 PIPE | 04/10 | MP5      |
| 16. | CHANGED STATE PARK LOGO           | 04/10 | MP5      |
| 15. | CHANGED TITLE BLOCK               | 12/07 | MP5      |
| 14. | CHANGED LUMBER TREATMENT NOTE     | 12/04 | MP5      |
| 13. | UPDATED PRESSURE TREATMENT NOTE   | 03/04 | MP5      |
| 12. | REPLACED STAMP                    | 03/04 | MP5      |
| 11. | REMOVED SCALES                    | 12/02 | D. Haqq. |
| NO. | REVISION                          | DATE  | APPROVED |

PREPARED:  
DRAWN: P. Nuech.  
REVIEWED: DH  
DATE: 1-27-83

SHEET 1  
OF 1 SHEETS

